

INSPIRED BY **NATURE**
REVOLUTIONIZED BY **SUREFOOT**



ENGINEERS
AUSTRALIA



SUREFOOTTM
QUEENSLAND
CONCRETE FREE FOOTING SYSTEM



1300 64 64 23



SUREFOOT SYSTEMS & ACCESSORIES

THE SUREFOOT PRINCIPLE

Surefoot's engineering principles are based on a combination of shallow and deep foundation design methodology. It uses the theory of bearing capacity of a shallow foundation, plus the skin friction and toe resistance of a deep foundation in all soil types through a fully certified footing design. Micro piles are driven with a jackhammer. The footing has instant capacity and does not disturb the ground, therefore affording tremendous efficiency of time, labour, material and project cost.


Low cost, time saving, high strength & instant bearing capacity- Surefoot pile cap mimics a tree's root system through a series of steel micro piles in a battered array, resolving foundations at relatively shallow depths and efficient transfer of load and uplift forces with minimal soil disturbance.

SUREFOOT VS CONCRETE

	 SUREFOOT	CONCRETE
Fixed costs	YES	NO
Excavations required	NO	YES
Dirt or spoil removal off site or relocation on site	NO	YES
Engineering inspection required	NO	YES
Concrete pump required	NO	YES
Propping materials for setting up posts	NO	YES
Gravel for bottom of post holes	NO	YES
Instant bearing capacity of foundations so your works can continue same day	YES	NO
Workplace health & safety risk	LOW	HIGH
Total installation time	SHORT	LONG
Rain delays - post holes full of water	NO	YES
Number of trades and materials required to organise	2	UP TO 10
Access issues for machinery & materials	NO	YES
Environmentally friendly	YES	NO
Re establishment of landscape required	NO	YES
Adjustable in both plumb & level after your foundation is installed	YES	NO



SUREFOOT™
QUEENSLAND
CONCRETE FREE FOOTING SYSTEM

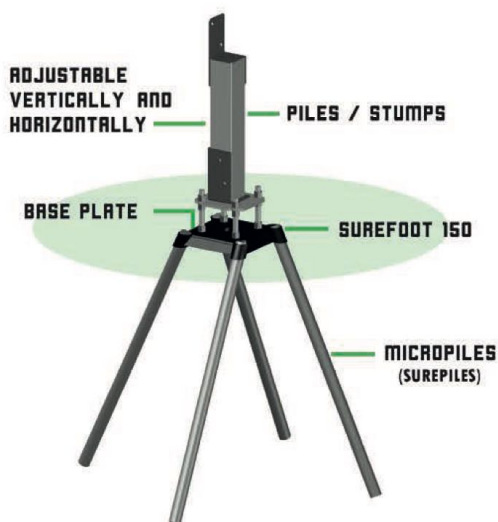

SUREFOOT FOOTINGS ARE

- High strength
- Simple
- Cost effective
- Quick to install
- Minimal soil and site disturbance
- Recyclable and reusable
- Suitable for large floor spans of up to 4m
- Suitable in cyclonic regions
- Ideal for remote areas and difficult terrain
- Backed by our technical support team
- Independently tested to ASTM piling standards
- Green solution for low carbon footing system
- Ability to support various types of loading such as compression, uplift, lateral loads and bending moments
- Suitable in any penetrable soil such as sand, silt, clay, fine gravels and even sedimentary rock



COST SAVINGS

SUSTAINABLE

TIME SAVER

NO HEAVY EQUIPMENT

QUALITY MATERIALS

“Surefoot’s aim is to inform all industries that there are better, faster, cleaner and easier alternatives than using concrete.”

T150 (\$F 50)

Residential

Bolting pattern:
147 mm x 3 x 16mm holes

Micro Piles:
3 x 32NB (Nominal Bore) 42.40D
Galvanised Pipe Light, Medium, Heavy

Load capacity:
Up to 25kN

Average installation time:
10 minutes approx



S250 (\$F 150)

Residential

Bolting pattern:
140mm centres x 4 x 22mm holes

Micro Piles:
4 x 32NB (Nominal Bore) 42.40D
Galvanised Pipe Light, Medium, Heavy

Load capacity: Up to 100kN

Average installation time:
10 minutes approx



4-WAY



3-WAY



2-WAY

S400 (\$F 300)

Commercial

Bolting pattern:
198-250 PCD x 4 x 22mm holes
300-350 PCD x 4 x 26mm holes

Micro Piles:
6 x 32NB (Nominal Bore) 42.40D
Galvanised Pipe Light, Medium, Heavy

Load capacity: Up to 160kN

Average installation time: 15 minutes



S500 (\$F 500)

Commercial

Bolting pattern:
233-300 PCD x 4 x 22mm holes
350-400 PCD x 4 x 26mm holes

Micro Piles:
12 x 32NB (Nominal Bore) 42.40D
Galvanised Pipe Light, Medium, Heavy

Load capacity:
Up to 300kN

Average installation time: 25-30 minutes approx



S600 (\$F 600)

Commercial

Bolting pattern:
350-400 PCD x 4 x 26mm holes
432-500 PCD x 4 x 32mm holes

Micro Piles:
16 x 32NB (Nominal Bore) 42.40D
Galvanised Pipe Light, Medium, Heavy

Load capacity: Up to 360kN


Average installation time: 40 minutes approx



Surefoot Load capacities are indicative and are dependent on soil type and pile embedment depth, for specification, please contact Surefoot directly.



SOIL TEST

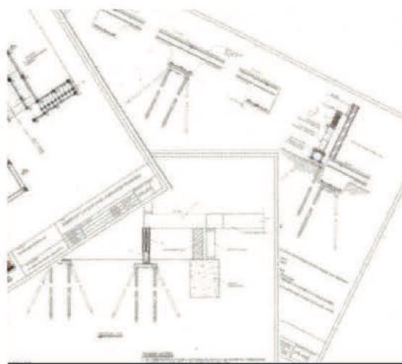




ENGINEERING DESIGN



PLACE SUREFOOT LEVEL

SUREFOOT SYSTEM SIMPLE INSTALL

FULLY ADJUSTABLE

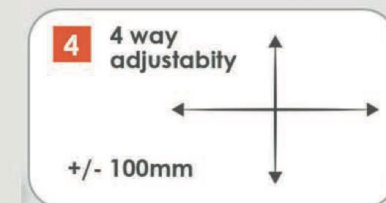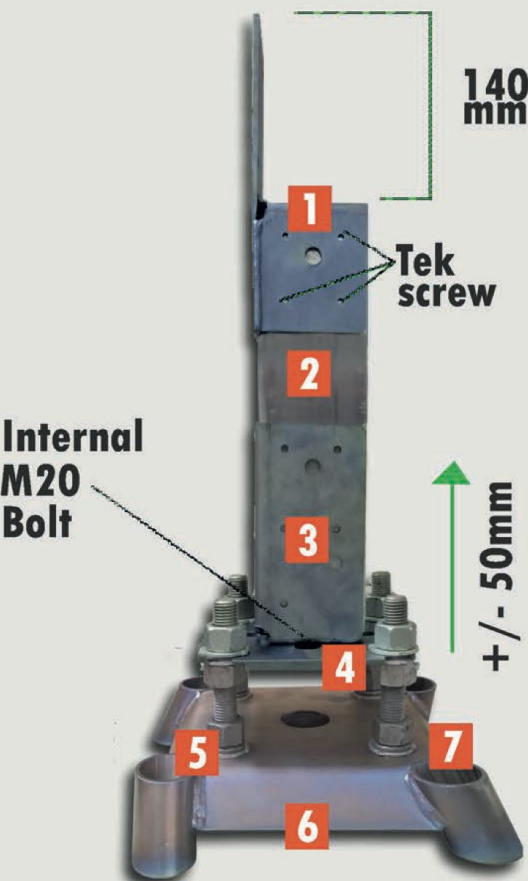



JACK HAMMER MICRO PILES



ADD BASE PLATES



PLACE SYSTEM

SEMI ADJUSTABLE / WELD DIRECT



Adjustable universal base Bracket with Angle M20/M12 bolt



12mm Adjustable Base Plate




32NB galvanised pipe Light, Medium, Heavy



Jackhammer Driver



6 Rotate anywhere on the Surefoot plate. Use 4x Series 500 Tek to secure or via M20 bolt.


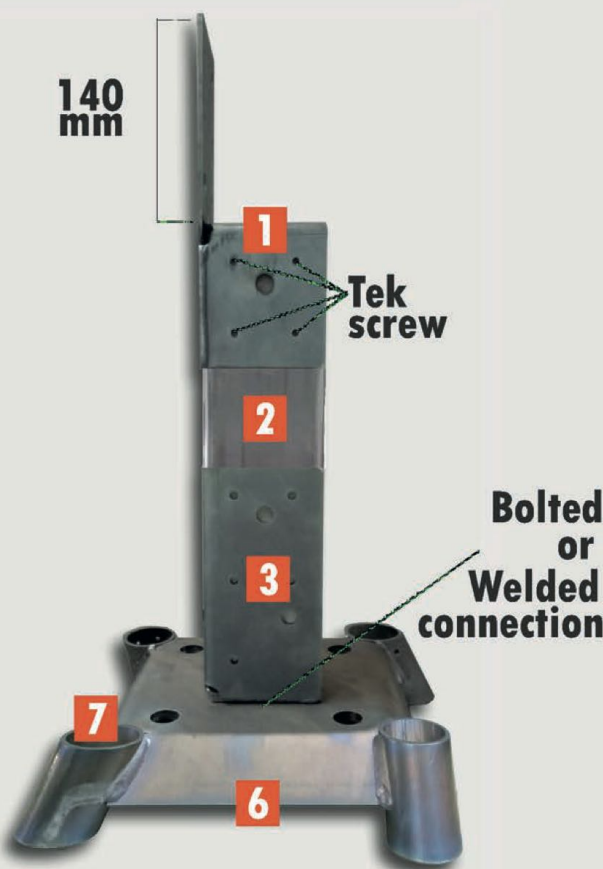




- Housing - ideal for sloping sites
- Prefabricated structures
- Modular construction
- Decking
- Pergolas
- Fencing
- Sheds
- Carports
- Shade structures/ sails
- Playground equipment
- Green building
- Temporary structures



- Deck footings
- Shade sails
- Umbrellas
- Fences
- Backyard sheds
- Light poles
- Stock yards
- Remedial work
- Retaining walls & sound barriers





COMMERCIAL

- Commercial construction
- Portal frame construction
- Concrete slab support
- Suspended floors/ slabs
- Cyclonic tie downs
- Stabilisation
- Boardwalks and jetties
- Bus shelters
- Bridges
- Winch points



CIVIL

- Defence industry
- Mining industry
- Energy industry
- Signage, banner & flag industry
- Communication industry
- Tethering industry
- Event industry
- Renewable energy, solar & wind farms





SUREFOOT™
QUEENSLAND
 CONCRETE FREE FOOTING SYSTEM

GOLD COAST DISTRIBUTION CENTRE

1/28-30 Newheath Drive Arundel, Queensland 4214

1300 64 64 23
surefootqld.com.au

AUSTRALIAN STANDARDS

AS 2870-2011
 AS/NZS 4600-2005
 AS/NZS 1170.2-2011
 AS 2159-2009
 AS 1074-1989

AS/NZS-2041.1 2011
 AS/NZS-4680:2006
 AS 3566.2-2002
 AS 1726-1993

ASTM TESTING

ASTM 1143
 ASTM 1143-81
 ASTM D1143/D1143M-07
 ASTM D3689
 FHWA-97-070

EUROCODE TESTING

EUROCODE EN1990
 EUROCODE 1 EN1991
 EUROCODE 3 EN1193
 EUROCODE 7
 EN14199
 EN12699